

<Location>, <Country> - <Month> <Year>





Copy ...Rights

This slide set is the ownership of the 6DEPLOY project (and previous projects 6NET, EURO6IX and 6DISS) via its partners

The Powerpoint version of this material may be reused and modified only with written authorization

Using part of this material must mention 6DEPLOY courtesy

PDF files are available from www.6deploy.eu

Looking for a contact ?

- Mail to : martin.potts@martel-consulting.ch
- Or bernard.tuy@renater.fr



Contributors

- Jim Bound, HP
- Brian Carpenter, IBM, Switzerland
- Tim Chown, UoS, UK
- Johann Fiedler, FhG, Germany
- Ian Foster, Argonne National Labs
- Tony Hain, Cisco, USA
- Sheng Jiang, Peter Kirstein, Piers O'Hanlon, Socrates Varakliotis, UCL, UK
- R. Ruppelt, FhG, Germany
- Jacques Saint Blancat, IBM, France
- Laurent Toutain, ENST-Bretagne IRISA, France
- Bernard Tuy, Renater, France
- Carlos Friaças, FCCN, Portugal



Agenda

- Porting Applications
- Heterogeneous Environments
- Available Applications Listings
- Services and Network Applications



<Location>, <Country> - <Month> <Year>



Introduction

- Most IPv4 Applications can be IPv6 enabled
 - If certain precautions are taken
 - Good Programming discipline is applied
- If there are IPv4 and IPv6 versions, most can be made dual stack
- Particularly satisfactory if written in a language that allows for IPv6
 - Java is a good example
- Affects anything that reads/writes/stores/passes IP addresses (just about every higher protocol)
- New DNS record type: AAAA



Sockets API Changes

Name to Address Translation Functions
Address Conversion Functions
Address Data Structures
Wildcard Addresses
Constant Additions
Core Sockets Functions
Socket Options
New Macros



Core Sockets Functions

Core APIs

- ■Use IPv6 Family and Address Structures
- •socket() Uses PF_INET6

Functions that pass addresses

- •bind()
- •connect()
- sendmsg()
- sendto()

Functions that return addresses

- •accept()
- •recvfrom()
- •recvmsg()
- •getpeername()
- •getsockname()



Name to Address Translation

getaddrinfo()

- Pass in nodename and/or servicename string
 - Can Be Address and/or Port
- Optional Hints for Family, Type and Protocol
 - Flags AI_PASSIVE, AI_CANNONNAME, AI_NUMERICHOST, AI_NUMERICSERV, AI_V4MAPPED, AI_ALL,
 AI_ADDRCONFIG
- Pointer to Linked List of addrinfo structures Returned
 - Multiple Addresses to Choose From

freeaddrinfo()

```
int getaddrinfo(
    IN const char FAR * nodename,
    IN const char FAR * servname,
    IN const struct addrinfo FAR * hints,
    OUT struct addrinfo FAR * FAR * res
    );
```

```
struct addrinfo {
    int ai_flags;
    int ai_family;
    int ai_socktype;
    int ai_protocol;
    size_t ai_addrlen;
    char *ai_canonname;
    struct sockaddr *ai_addr;
    struct addrinfo *ai_next;
};
```



Address to Name Translation

getnameinfo()

- Pass in address (v4 or v6) and port
 - Size Indicated by salen
 - Also Size for Name and Service buffers (NI_MAXHOST, NI_MAXSERV)
- Flags
 - NI_NOFQDN
 - NI_NUMERICHOST
 - NI_NAMEREQD
 - NI_NUMERICSERV
 - NI_DGRAM

```
int getnameinfo(
    IN const struct sockaddr FAR * sa,
    IN socklen_t salen,
    OUT char FAR * host,
    IN size_t hostlen,
    OUT char FAR * serv,
    IN size_t servlen,
    IN int flags
    );
```



Porting Environments

Node Types

- IPv4-only
- IPv6-only
- IPv6/IPv4

Application Types

- IPv6-unaware
- IPv6-capable
- IPv6-required

IPv4 Mapped Addresses



Porting Issues

Running on ANY System

Including IPv4-only

Address Size Issues
New IPv6 APIs for IPv4/IPv6
Ordering of API Calls
User Interface Issues
Higher Layer Protocol Changes



Specific things to look for

Storing IP address in 4 bytes of an array.

Use of explicit dotted decimal format in UI.

Obsolete / New:

•	AF_INET	replaced by	AF_INET6
---	---------	-------------	----------

•	SOCKADDR_IN	replaced by	y SOCKADDR_	STORAGE

•	IPPROTO_IP	replaced by	IPPROTO_IPV6
---	------------	-------------	--------------



IPv6 literal addresses in URL's

From RFC 2732

Literal IPv6 Address Format in URL's Syntax To use a literal IPv6 address in a URL, the literal address should be enclosed in "[" and "]" characters. For example the following literal IPv6 addresses: FEDC:BA98:7654:3210:FEDC:BA98:7654:3210

3ffe:2a00:100:7031::1

::192.9.5.5

2010:836B:4179::836B:4179

would be represented as in the following example URLs:

http://[FEDC:BA98:7654:3210:FEDC:BA98:7654:3210]:80/index.html

http://[3ffe:2a00:100:7031::1]

http://[::192.9.5.5]/ipng

http://[2010:836B:4179::836B:4179]



Other Issues

Renumbering & Mobility routinely result in changing IP Addresses –

Use Names and Resolve, Don't Cache

Multi-homed Servers

- More Common with IPv6
- Try All Addresses Returned

Using New IPv6 Functionality



Porting Steps - Summary

Use IPv4/IPv6 Protocol/Address Family Fix Address Structures

- ■in6_addr
- sockaddr_in6
- sockaddr_storage to allocate storage

Fix Wildcard Address Use

- •in6addr_any, IN6ADDR_ANY_INIT
- •in6addr_loopback, IN6ADDR_LOOPBACK_INIT

Use IPv6 Socket Options

■IPPROTO_IPV6, Options as Needed

Use getaddrinfo()

■For Address Resolution




Dual stack

Both IPv4 and IPv6 stacks will be available during the transition period

Dual network stack machine will allow to provide a service both for IPv4 and IPv6

2 different implementations of network stack

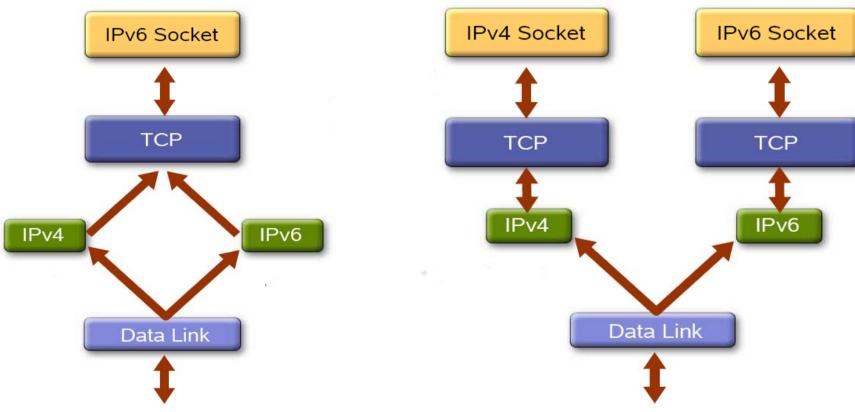


Source: Rino Nucara, GARR, EuChinaGRID IPv6 Tutorial



Mapping IPv4 address in IPv6

IPv6/IPv4 Clients connecting to an IPv6 server at dual stack node → 1 socket

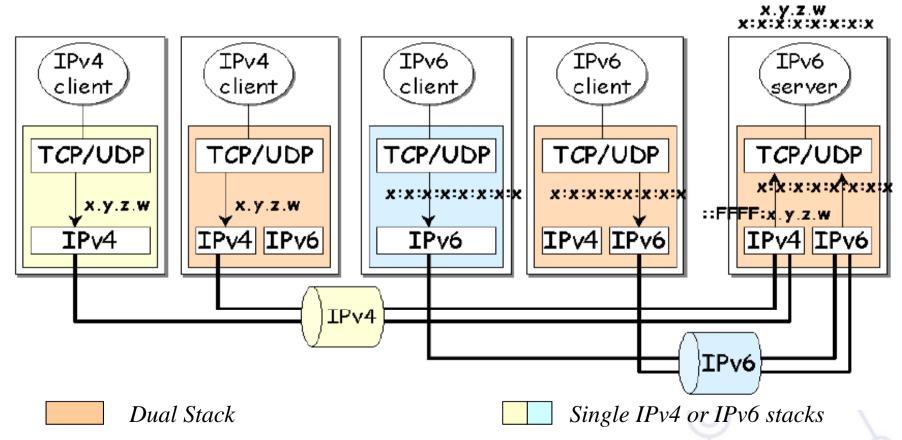


Source : Programming guidelines on transition to IPv6 T. P de Miguel, E. M. Castro



IPv4-only and IPv6-only


IPv6/IPv4 Clients connecting to an IPv4-only server and IPv6 only server at dual stack node → 2 sockets

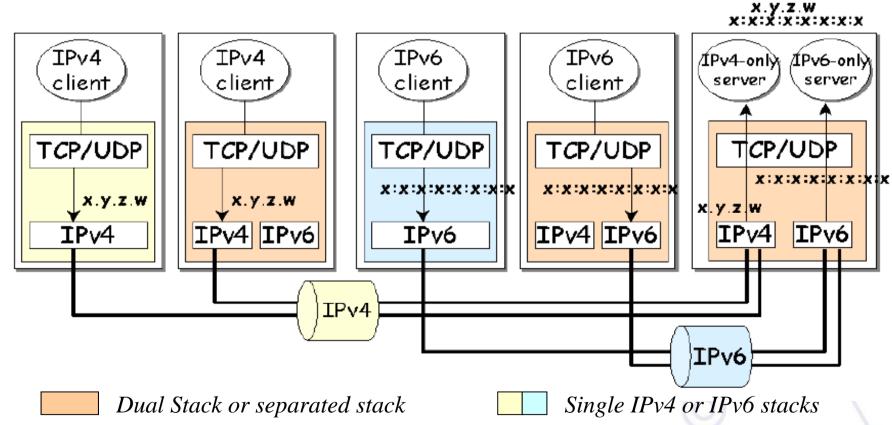

Source: Programming guidelines on transition to IPv6 T. P de Miguel, E. M. Castro




IPv4 /IPv6 interoperability

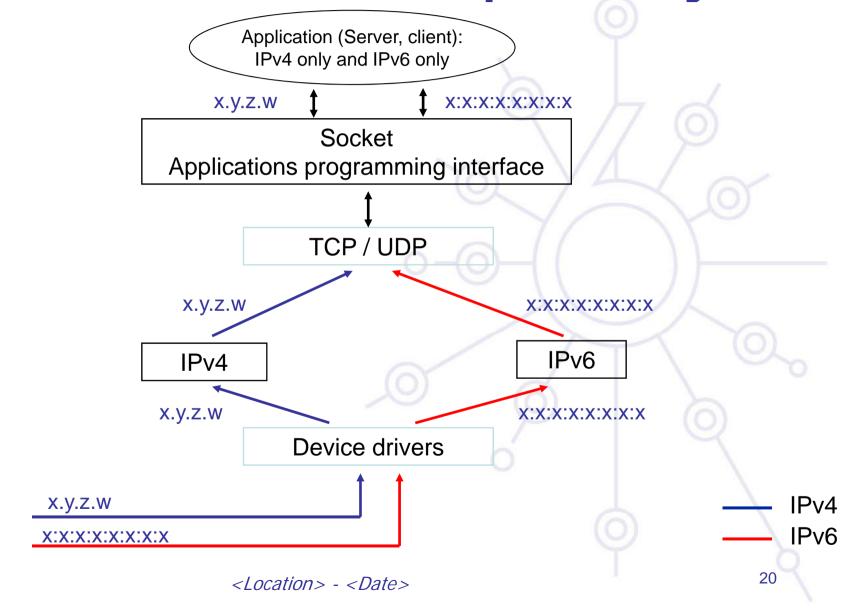




IPv4 /IPv6 interoperability

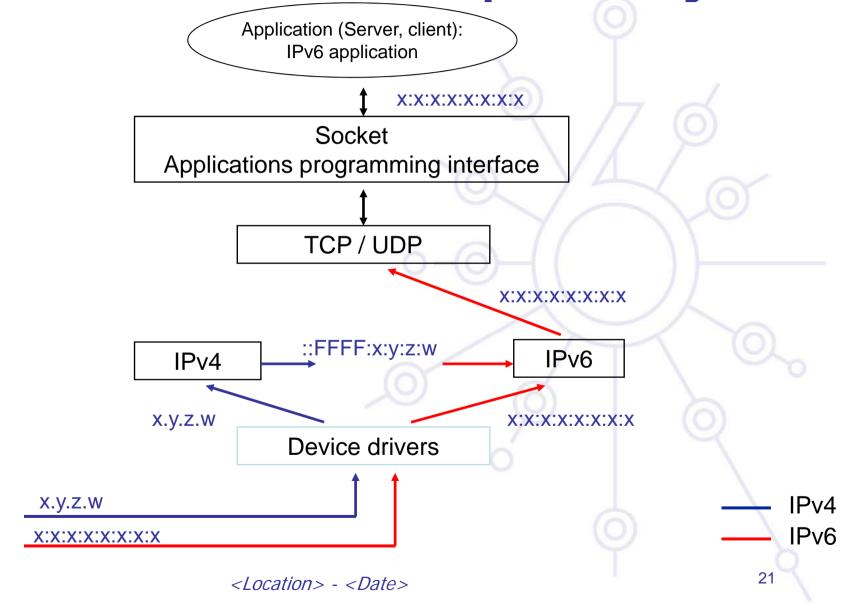




Algorithm of low level programming of a server 1/2

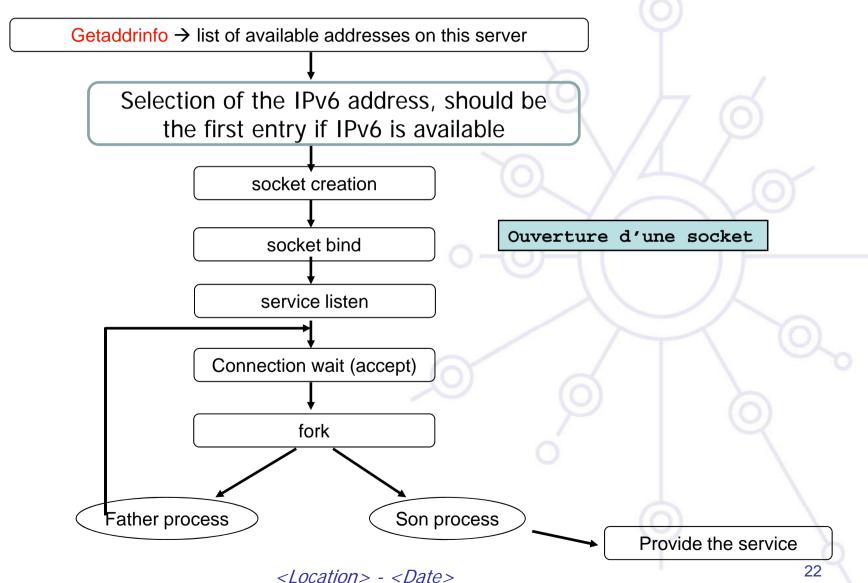



Algorithm of low level programming of a server 2/2

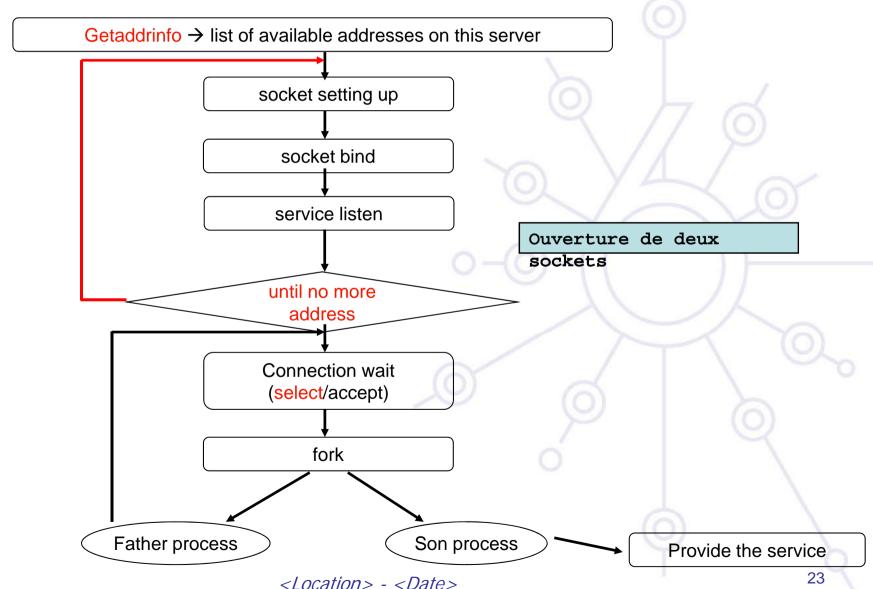



<Location>, <Country> - <Month> <Year>



Precautions for Dual Stack

Avoid any explicit use of IP addresses

Normally do Call by Name (i.e. make use of DNS!)

Ensure that calls to network utilities are concentrated in one subroutine

Ensure that libraries and utilities used support both stacks

Do not request utilities that would not exist in both stacks

• E.g. IPsec, MIP, Neighbour Discovery may vary



New Applications

For new Apps, some can use high-level language

JAVA fully supports dual stack

Examples of utilities that must so support

DNS, SSH, FTP, Web server, Resource Location

Examples of libraries and applications that must so support

RTP library, NTP time protocol, Web browser,
 IPsec library



Legacy Applications

If most parts are written in say Java, and small parts in say C, try to rewrite C part to be in Java or at least make sure that I/O is concentrated in certain regions

Potentially re-arrange code so that it fits needs of earlier slide

Adjust I/f to code to fit dual-stack specs

- Or do all networking via a utility which is IPv6-enabled
- VIC, RAT using RTP are good example



Heterogeneous IPv4/IPv6 Environments

May require dual-stack client/server, accessible by both stacks

Often used, for example, with Web services and with SIP signalling

May require transition gateway

As for example with IPv4 telephones accessing other IPv6 ones

May be very difficult, as when encrypted IPv4 messages are passed into the IPv6 networks with packet header encrypted, or certificate cryptographically bound to IP4 address



<Location>, <Country> - <Month> <Year>



Available IPv6 Enabled Applications

Many have been tested under 6NET, Description given in

http://6net.iif.hu/ipv6_apps

Check if your application is IPv6 enable

http://www.ipv6-to-standard.org

Most currently useful utilities exist, e.g.


SIP, WWW, RTP, SSH, MIP, IPsec, NTP

6NET Deliverables discuss their use

Particularly those of WP5



6net Application DB

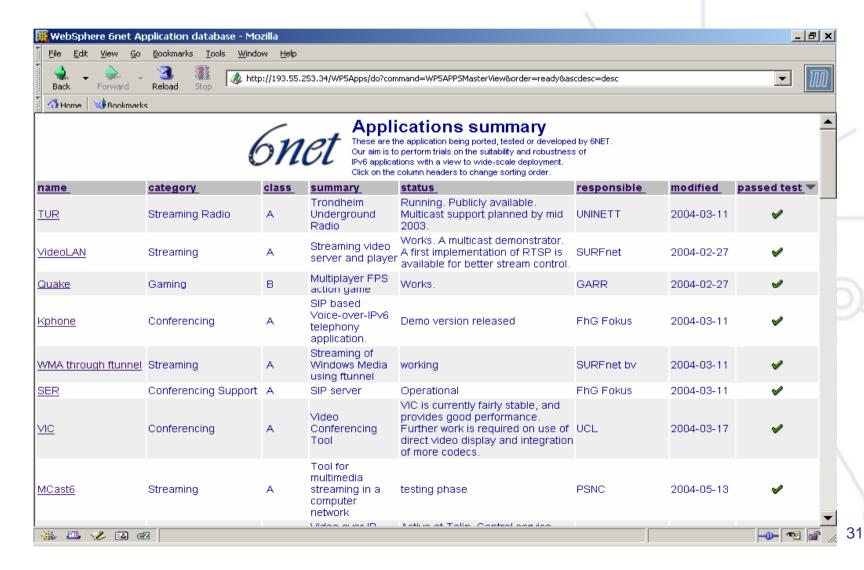



Pv6 to Standard

IPv6 to Standard

+ 🕙 http://www.ipv6-to-standard.org/



C Q- Google

IPv6 to Standard


The IETF IPv6 and IPv6 Maintenance working groups have started the process to advance the core IPv6 specifications to the last step in the IETF s Standard). IETF protocols are elevated to the Internet Standard level when significant implementation and successful operational experience has bee IPv6 products are encouraged to participate in this process by identifying their IPv6-enabled products by means of this web page.

Check IPv6 RFCs Status here.



If you can't find your Product, Service or Application in this page, please, submit it.

Total (1938)





Content: Now available over IPv6!

- Google (+YouTube, +...)
 - www.google.com/ipv6
 - For whitelisted networks
 - (i.e. DNS resolvers)



Facebook

- www.v6.facebook.com
 - different DNS name path





<Location>, <Country> - <Month> <Year>



Applications/Services

Basic applications

- MUAs, MTAs
- Web browsers & servers,
- FTP, SSH, Telnet

Advanced applications

- Videoconferencing tools, streaming, ...
- Editors, Games, ...
- Management and monitoring tools



Basic applications: Mail

Server:

- Qmail (Unix/Linux/xBSD)
- Sendmail (Unix/Linux/xBSD)
- Postfix (Linux)
- Dovecot (Linux)

Client:

- Thunderbird (all platforms)
- Inframail (windows/xBSD)
- Evolution (Linux)



E-Mail/Postfix

- Postfix >= 2.2 supports IPv6
- Example: /etc/postfix/main.cf

```
inet_protocols = ipv4, ipv6
smtp_bind_address6 = 2001:db8:1:1::1600
smtp_bind_address = 172.16.250.1
inet_interfaces = 2001:db8:1:1::1600, localhost
mynetworks = [2001:db8:1:1::]/64 172.16.250.0/24 [::1]/128 127.0.0.0/8
```

Answers on port 25, both in IPv4 and IPv6





E-Mail

- It's not only the MX(s) server(s) who need IPv6 addresses...
 - The servers from where your users retrieve e-mail (POP, IMAP, ...) can also start operating with IPv6 enabled

• Transparency !!!







Basic applications: Web

Server:

- Apache2 (all platforms)
- thttpd (Unix/Linux/xBSD)
- IIS (windows)

Client:

- Firefox (all platforms)
- Internet Explorer (windows)
- Safari (MacOS, windows)
- Opera (windows, ...)
- Wget (Unix/Linux/xBSD)
- Lynx (Unix/Linux/xBSD)
- Symbian S60 webclients



Web/Apache

- Apache >= 2.x supports IPv6
- Directives
 - Listen 80 (place only port and not an IP address)
 - NameVirtualHost <address> (place [] before and after the IPv6 address)
 - VirtualHost <endereço> (place [] before and after the IPv6 address)
- Example: httpd.conf

```
Listen 80
```

NameVirtualHost [2001:690:1fff:200:20e:cff:fe31:c81f]

<VirtualHost [2001:690:1fff:200:20e:cff:fe31:c81f]>

DocumentRoot /usr/local/apache2/htdocs/lg

ServerAdmin ip6adm@fccn.pt

ServerName Ig.ip6.fccn.pt

ServerAlias Ig.tbed.ip6.fccn.pt

ServerSignature email

</VirtualHost>

<Location> - <Date>





Basic applications: FTP

Server:

- Ftpd(Unix/Linux/xBSD)
- vsFTP (all platforms)
- Pure-ftpd(all platforms)

Client:

- Filezilla (all platforms)
- Ncftp (Windows, MAC, Linux)
- Fget (Unix/Linux/xBSD)
- Wget (Unix/Linux/xBSD)



FTP

• VsFTP >= 2.0.x supports IPv6

 Example: /etc/xinetd.d/vsftpd service ftp

```
socket_type
                 = stream
 wait
                  = no
                  = root
 user
            = /usr/local/sbin/vsftpd
 server
                 = /etc/vsftpd.conf
 server_args
flags
                = IPV6
 nice
                  = 10
 disable
                  = no
```



Answer on port 21, both in IPv4 and IPv6



Basic applications: SSH, telnet

Server:

- sshd (Unix/Linux/xBSD)
- Openssh (Unix/Linux/xBSD)

Client:

- puTTY (all platforms)
- telnet (Unix/Linux/xBSD), unsecure...



Advanced applications

Videoconferencing tools, streaming:

- Videolan (all platforms)
 - IPv6 unicast/multicast streaming, www.videolan.org
- Ekiga (former GnomeMeeting)
 - H323 application
- OpenH323 (all platforms)
- ISABEL
- DVTS

Multicast


Peer to peer applications

- Gnutella (all platforms)
- Azureus
- uTorrent
- ...



Video On-Demand

- Windows Media Services 9 (>Win2003 Server)
- VideoLan Tool
 - www.videolan.org

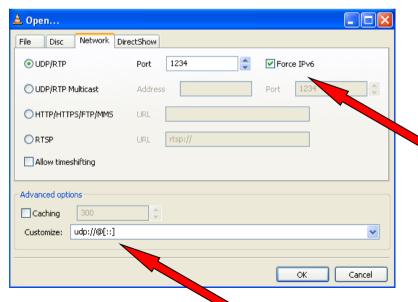





Videoconference

Several Components

- H.323 Managers: OpenMCU

- Clients: Ekiga (former GnomeMeeting), ConferenceXP










Multicast


- Goal: Traffic flows savings
- The architecture is difficult to maintain and operate at the interdomain level (between different ISP networks)
- With IPv6, the concept of Source Specific Multicast (SSM) starts to be used

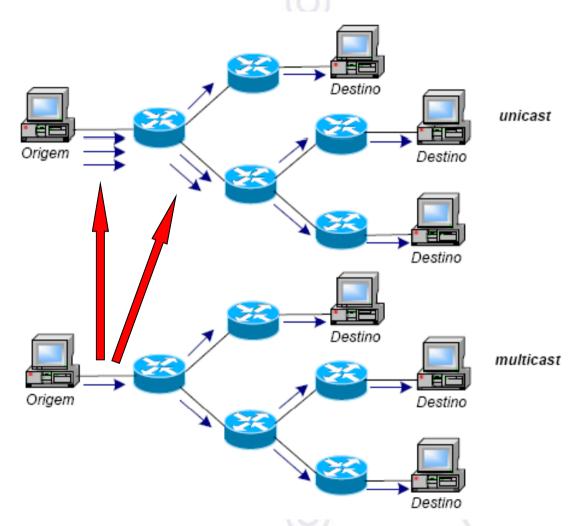



Multicast


- IPv4: IGMP, Internet Group Management Protocol
- IPv6: MLD, Multicast Listener Discovery
- Protocols to manage Multicast groups
 - used between the client and the gateway
 - stop undesired traffic to hit switch ports which are not acessing Multicast groups

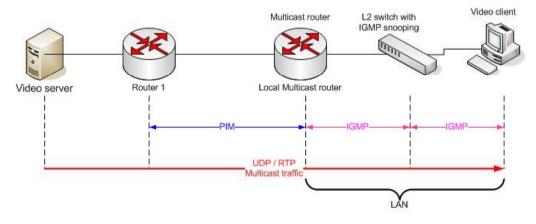



P2P - Peer-to-Peer

- Virtually all nodes provide a service
- Critical Infrastructure:
 - DNS
 - «Rendez-Vouz»
 Service/«Tracker»
- Without restrictions regarding the initiator party
- All participants share a consistent network vision

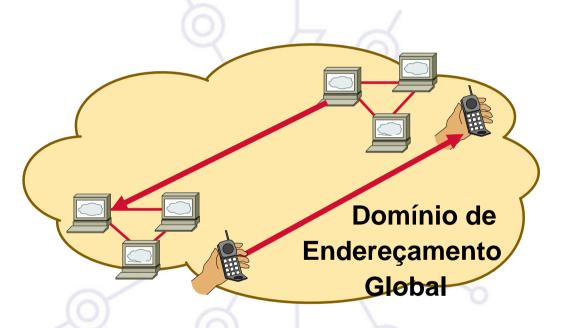



P2P - Bittorrent

- Protocol created in 2002
- There are loads of legal content accessible through this protocol:
 - http://fedoraproject.org/en/get-fedora
- IPv6 Support in some clients
- Always platform dependent
 - Win/Linux/BSD/Mac
- IPv6 Communication with:
 - «Tracker»
 - Other clients

Client	Version		Δ	@	É
ABC	3.1	N	?	?	?
ABC_OKC	3.5.0	Υ	?	?	?
Artic Torrent	1.2.3	N	?	?	?
Azureus	2.5/3.0	N	Υ	?	Υ
BitTornado	T-0.3.18	Υ	Υ	?	?
BitTorrent	5.0.7	N	?	?	?
BitTorrent Plus! v2	1.32	Υ	?	?	?
BitTyrant	2.5.0.0	N	?	?	?
BTG	0.9.5-rc2	-	Υ	?	?
KTorrent	2.1.2.0	-	N	?	?
LH-ABC	3.2.0	Υ	Υ	?	?
Opera	9.2.1	N	Υ	?	?
qBittorrent	0.9.3	-	N	-	-
<u>SharkTorrent</u>	0.1.2 beta	N	?	?	?
Torrent Swapper	1.0	N	?	?	?
Transmission	0.8.0	?	Υ	?	Υ
uTorrent	1.8.0.76+	Υ	?	?	?
XBT Client	0.7.3	N	?	?	?




P2P - Azureus

	s detalhes,	visite		
Opções	s Socket			
Nr. má:	ximo de ten	tativas simultâneas de ligações de saída [0: saída inibi	da] 8 💲	
Ligar (E	Bind) ao end	lereço de IP local or interface		
3rd IP of The 1st	of the 2nd in : IP will be u	.1.5;eth0;eth1[2] will bind the specified IP, to all IPs on hterface. Ised for all services, all others are only used for load b faces are available:		
tun1	ormig moon	acco are a ranapior		
eth0	eth0[0] eth0[1]	192.168.1.100 fe80:0:0:0:21f;c6ff;fe5b;56db%4	•	
lo	lo[0] lo[1] lo[2]	127.0.0.1 0:0:0:0:0:0:0:1 fe80:0:0:0:0:0:0:1%1		
tun0 tun2	tun0[0] tun0[1]	2001:0:d5c7:a2ca:0:fbfb:a64b:6112 fe80:0:0:0:0:ffff;ffff;fffd%5	•	
curiz	tun2[0]	fe80:0:0:0:0:5efe:c0a8:164%2		
Bind à p	oorta local [0: desactivado]	0 😂	
Unidade de Transmissão Máxima por Linha (MTU) 150			1500 🗘	
Tamanho do buffer de saída - SO_SNDBUF [0: definido pelo SO]				
Tamanho do buffer de entrada - SO_RCVBUF [0: definido pelo SO]				
Outgoir	ng packet D	iffServ value (TOS field)		
!ConfigView.section.connection.advanced.read_select! 25				
!ConfigView.section.connection.advanced.write_select!			25 🗘	



P2P - uTorrent

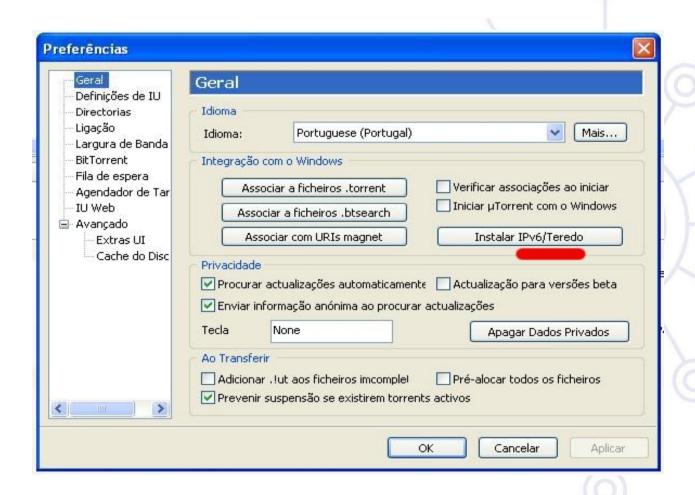



Conclusion

IPv4-only applications are now IPv6-enabled

Basic & Advanced

New services/applications/paradigms will take a step forward into IPv6?

- Grid Computing
- Cloud Computing



<Location>, <Country> - <Month> <Year>